


>> USER MANUAL <<



PV1000W

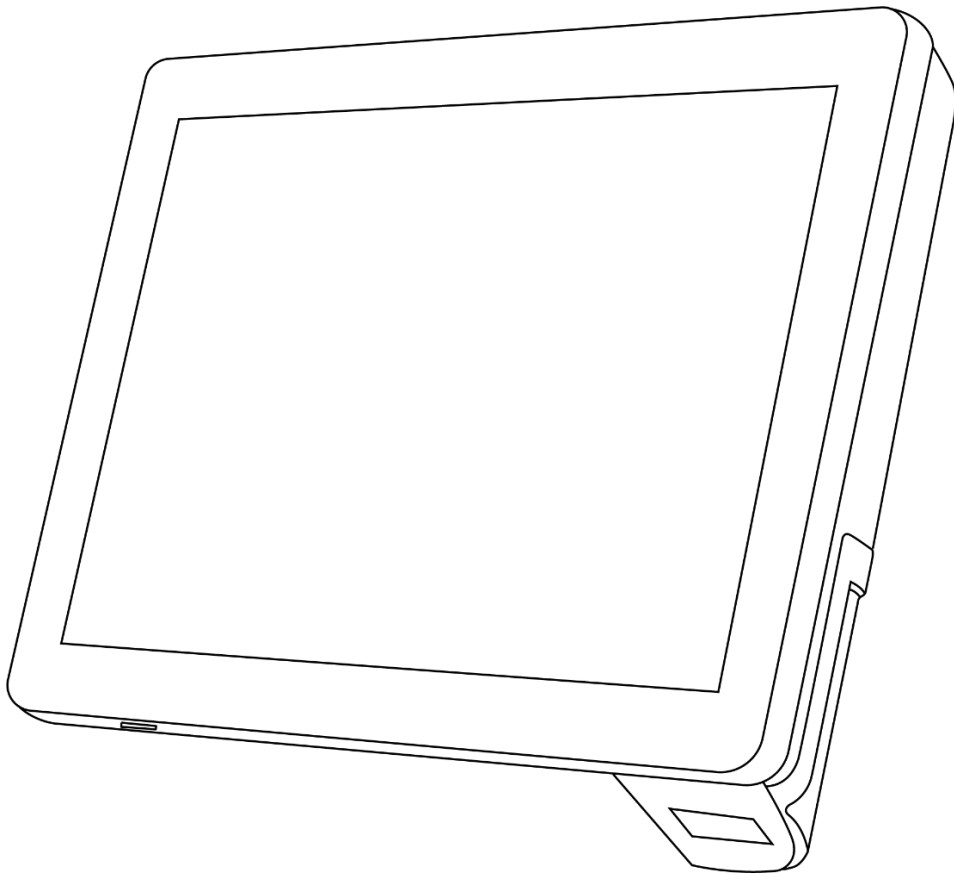

Disclaimer

- ✓ Please read the instructions carefully before equipment installation and using the device.
- ✓ Do not put the product in high temperature, humid or dusty environment.
- ✓ Do not drop, crash or break down this product.
- ✓ Do not power off the device when it' s formatting or upgrading, otherwise it will cause operation system error.
- ✓ Use only approved add-on enhancements.

Content

Product Description	1
Hardware Instruction	3
Installation.....	3
Getting started	4
Accessory & Installation	4
POE Module.....	4
Barcode Scanner.....	5
EasySet App	6
Warranty Notice.....	8

Product Description

Improve customer service and the customer experience with the latest innovation in self-service technology, PV1000W Plus micro kiosk. This compact, easy-to-install and affordable device allows retailers to put the power of self-service in every aisle or department. So, no matter where in the store your customers might be, help is never more than a few steps away. Customers can check price and inventory, check the balance on a gift card, look up a loyalty point balance, determine the location of a product and call for assistance — all with the scan of a barcode.

Overview – Specifications

SYSTEM	
Processor	Intel Celeron J6412 Quad-Core, Up to 2.6Ghz
Memory	4GB DDR3
Storage	128GB SSD
OS	Windows 7, 10, 11
DISPLAY	
Type	10.1" IPS Display
Resolution	1280*800
Brightness	400cd/m ²
Viewing Angle(CR≥10)	170 Degree(H)
	170 Degree(V)
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	3*USB2.0, 1*USB3.0
LAN	1*Gigabit Ethernet, RJ45
Audio	1*Line in, 1*Mic out
Display	1*HDMI, 1*VGA
Power DC-IN	Input AC 100~240V/50~60hz, Output DC12V/3A
SCANNER	
Image Sensor	640*480 CMOS
Illumination	White LED
Aiming	Red LED(625nm)
Data Capture	All major 1D Symbologies, including Code 128, EAN-13, EAN-8, Code 39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ITF-6, ITF-14, ISBN, ISSN, Code 93, UCC/EAN-128, GS1 Databar, Matrix 2 of 5, Code 11, Industrial 2 of 5, Standard 2 of 5, AIM128, Plessey, MSI-Plessey
	All major 2D symbologies, including PDF417, QR Code, Micro QR, Data Matrix
Resolution	≥3mil

Typical Depth of Field	EAN-13	60mm-350mm (13mil)
	Code 39	40mm-150mm (5mil)
	PDF417	50mm-125mm (6.7mil)

	Data Matrix	45mm-120mm (10mil) QR Code 30mm-170mm (15mil)
--	-------------	---

Scan Angle	Roll: 360°, Pitch: ±60°, Skew: ±60°
------------	-------------------------------------

Min.Symbol Contrast	25%
---------------------	-----

Field of View	Horizontal 42°, Vertical 31.5°
---------------	--------------------------------

PHYSICAL&ENVIRONMENTAL	
-----------------------------------	--

Operating Temperature	Operating -20~70°
-----------------------	-------------------

Storage Temperature	Storage -25°~75°
---------------------	------------------

Dimensions(W×H×D)	251 x 172 x 49(mm)
-------------------	--------------------

Packing Dimensions(W×H×D)	360 x 240 x 130(mm)
---------------------------	---------------------

Net Weight	1.00KG
------------	--------

Packing Weight	2.24KG
----------------	--------

Color	Black
-------	-------


VESA	75*75mm
------	---------

Built-in Functions	
---------------------------	--



WIFI	IEEE 802.11 b/g/n /ac(2.4Ghz) Option
------	--------------------------------------

Bluetooth	Bluetooth 4.0 Option
-----------	----------------------

Hardware Instruction

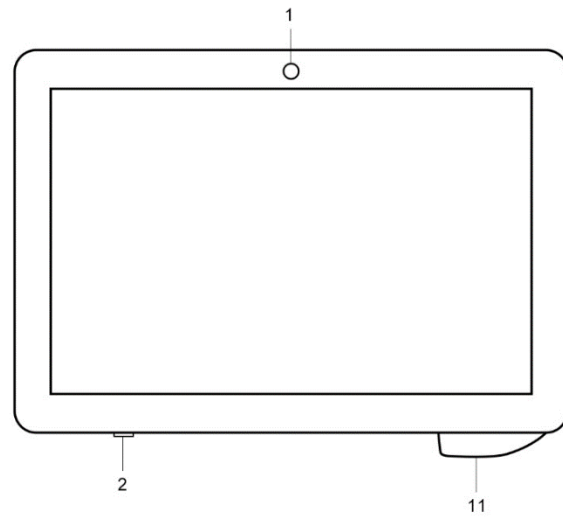

9

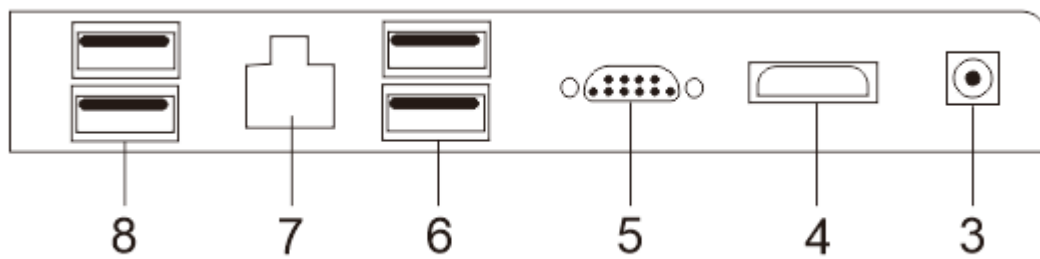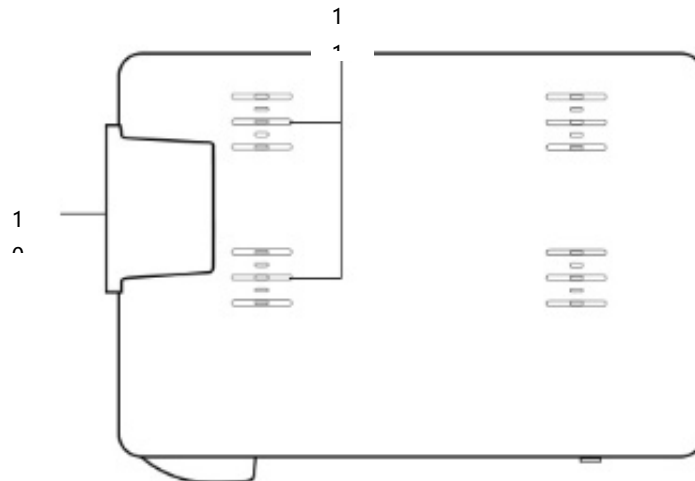

- 1. Front Camera(Optional)
- 2. Power Switch
- 3. DC12V Input
- 4. HDMI Out
- 5. VGA Out
- 6. USB3.0*2
- 7. Ethernet Port

- 8. USB 2.0*2
- 9. Scanner(Optional)
- 10. MSR Slot
- 11. Speaker

Installation

Unpacking Verify that the box contains:

- PV1000W terminal
- Power adapter
- Regional Specific power cord
- VESA 75*75mm bracket with 8 screws & 4 green plastic wall


anchors Remove all protective materials from the device.

Inspect the device for any damage during shipment.

Contact us immediately if system has damage and/or missing items as listed above, keep the shipment carton for logistics claim.

Wall mount

1. Remove the screw attaching the bracket to the VESA 75*75 mount.
2. Install the four green plastic wall anchors in a wall and then mount the bracket to the wall with the four long screws.
3. Install the VESA 75*75 mount to PV1000W with four M3*6 screws.
4. Hang the PV1000W to the bracket.
5. Attach the bracket to the VESA 75*75 mount from the bottom with the screw that was removed in step 1.



Getting started

1. Pull out IO cover to connect power adapter and needed cables and then install IO cover back.
2. Place power adapter carefully and prevent it from dropping
3. Connect power cord with power source, system will boot automatically when it is supplied with Power for the first time.
4. Screen will be on within few seconds and barcode scanner starts working with notification tone.

Accessory & Installation

MSR card reader installation

1. Pull out cover of MSR card reader from the system
2. Connect the cable of MSR card reader to the reserved connector and make sure it is inserted properly.
3. Fix MSR with 2 screws we provided.
4. Install MSR cover back and test the MSR.

Barcode Scanner

Barcode scanner is set up in auto mode as default setting. LED will light up when any object shows in front of barcode scanner within proper distance, and barcode scanner will automatically scan when a barcode showed within proper distance.

EasySet App


Introduction

EasySet is a configuration tool for Newland' s 1D/2D handheld barcode scanner, fixed mount barcode scanners and OEM scan engines. Its main features include:

- View device & configuration information of online device
- Configure device
- Update firmware of online device
- Load/modify existing XML configuration file; save current settings to an XML file
- Create/print/save programming barcodes to a PDF or Word file
- View/edit/save image stored on online device in the original image/BMP/JPG/TIFF format
- Send serial commands to online device and receive device response
- Supported languages: Chinese and English.

EasySet supports 32-bit/64-bit Microsoft WinXP/Win7/Win 8/Win 8.1/Win 10 operating systems. EasySet can communicate with device via one of the following interface: RS-232, USB COM Port Emulation (udp_and_vcom_driver required), USB CDC (CDC - Virtual COM Driver required), USB DataPipe (udp_and_vcom_driver required), USB HID-POS.


1. Install EasySet App. After the tool is installed, you can find the corresponding icon on desktop of PV1000W.
2. Click the icon to open the software.

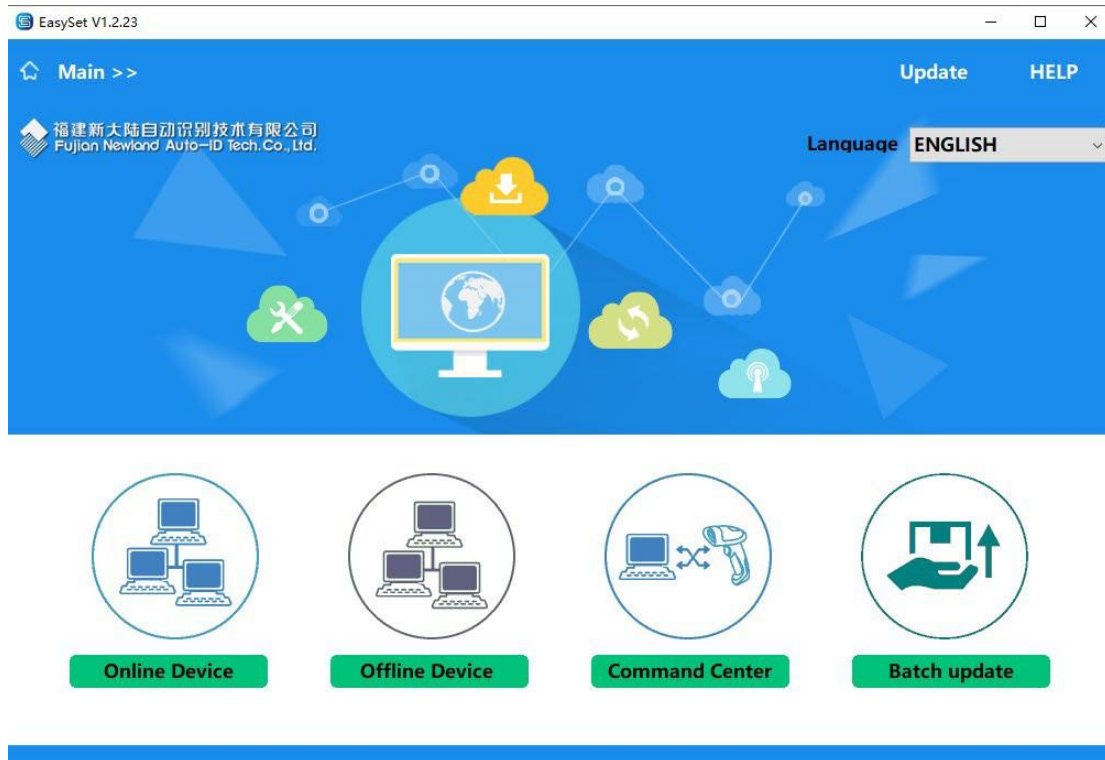


3. If the scanner device is connected and working, you can click “ Online Device’ ’ to obtain device information and set parameters, modify Settings and interact with the device.


EasySet V1.2.23





Main >> Online Device >> Update HELP


NLS-N1

Product Name: NLS-N1
Firmware Version: 1.00.010.5
Decoder Version: IOTC0610
Hardware Version: V1.1
Serial Number: A9155107
OEM Serial Number:
Manufacturing Date: 2021-06-01


Enter Setup


USB CDC COM Port

 Configure Device
 Refresh
 Update Firmware
 Cannot scan?

If the connected device is not shown here, scan the Barcodes above then wait while the device is automatically detected.

4. If the scanner is connected, the model number will show in this page. User could check or change the scanner settings according to their own demands. And then save to device.

The screenshot displays the 'EasySet V1.2.23' software interface. The top navigation bar includes 'Main >>', 'Online Device >>', 'Configure Device', 'Command Search', 'Update', and 'HELP'. Below this, a secondary navigation bar shows '1.SETTINGS', '2.SYMBOLOGIES', '3.DATA FORMATTING', '4.IMAGING', and '5.SCAN'. The main configuration area is divided into 'Interface' and 'Communication cable adaptive' sections. The 'Interface' section has a dropdown menu with options: RS-232, HID Keyboard (selected), HID POS, IBM SurePOS(Table-Top), IBM SurePOS(Hand-Held), and USB CDC COM Port. The 'Communication cable adaptive' section features a toggle switch currently set to 'Off' and a 'Default: 1' label. The right-hand sidebar contains a 'Scanning Device' section with an image of a scanner and the model number 'NLS-N1', and a 'Configuration History' section. Below these are several green buttons: 'Generate Bar Code', 'Open Config', 'Save Config', 'Restore All Factory Defaults', 'Save as Custom Defaults', 'Restore All Custom Defaults', and 'Save to Device'. The 'Media Format' dropdown is set to 'Display' and the 'Bar Code Type' dropdown is set to '1D'.

5. In Compare column, it allows user to compare the current settings with default setting.

The screenshot shows the EasySet V1.2.23 software interface. The main menu includes 'Main >>', 'Online Device >>', 'Configure Device', 'Command Search', 'Update', and 'HELP'. The current view is '6.COMPARE', with sub-tabs for 'Default Vs Current' and 'XML Vs Current'. The 'Default Vs Current' tab is active, displaying a table of settings. The table has columns for 'All', 'Command', 'Default', and 'Current'. A 'Clone' button is visible. To the right, there is a 'Scanning Device' section with an image of a handheld scanner labeled 'NLS-N1' and a 'Configuration History' section with various configuration options and buttons like 'Generate Bar Code', 'Open Config', 'Save Config', etc.

All	Command	Default	Current
<input type="checkbox"/>	Scanning Preferences	Normal Exposur...	Mobile Mode
<input type="checkbox"/>	Sensitivity (Sense Mode)	6	Medium(11)
<input type="checkbox"/>	Scanning Mode	Level Trigger M...	Sense Mode
<input type="checkbox"/>	GS1 Databar(RSS) Decoding	Off	On
<input type="checkbox"/>	Plessey Decoding	Off	On
<input type="checkbox"/>	MSI Plessey Decoding	Off	On
<input type="checkbox"/>	ISSN Decoding	Off	On
<input type="checkbox"/>	ISBN Decoding	Off	On
<input type="checkbox"/>	Interface	USB CDC COM ...	HID Keyboard
<input type="checkbox"/>	AIM 128 Decoding	Off	On
<input type="checkbox"/>	Code 11 Decoding	Off	On
<input type="checkbox"/>	Code 93 Decoding	Off	On
<input type="checkbox"/>	Micro QR Decoding	Off	On
<input type="checkbox"/>	Standard 2/5 Decoding	Off	On
<input type="checkbox"/>	ITF-6 Decoding	Disable	Enable but Don...
<input type="checkbox"/>	Industrial 2/5 Decoding	Off	On

6. Update

Click the "Check for Updates" button in the upper right corner to update the latest version of EasySet online.

Warranty notice

Thank you for purchasing the company's products! The warranty regulation is formulated hereby in order to protect your legal rights and interest and remove your future worries and improve after-sale service for customers. You are asked to read carefully and propose valuable opinion and suggestion. Respected users:

- I . The company's products enjoy free warranty of 18 months since the Shipment date. If it exceeds the warranty period, reasonable service expense and material cost will be charged.
- II. The product for repair should be packed and transported properly. If there is any damage or loss during the process of transportation, our company will not take responsibility.
- III. Our company has the right to refuse to provide service or charge material and service cost where appropriate with occurrence of the following items within the free warranty period.
 - 1.Product failure or damage caused by improper use of users;
 - 2. The accident of burning caused of electric shock or improper installation;
 - 3. Damage caused by dismantling of non repairmen.
 - 4. The label indicating fragile product is damaged.
- IV. Please read the user manual carefully before the company' s product is installed and used.
- V . The warranty card must be stamped with seal and indicate the date by the selling unit to ensure your rights and interest.