


PAM-300

PAM-300 Smart POS

User Guide

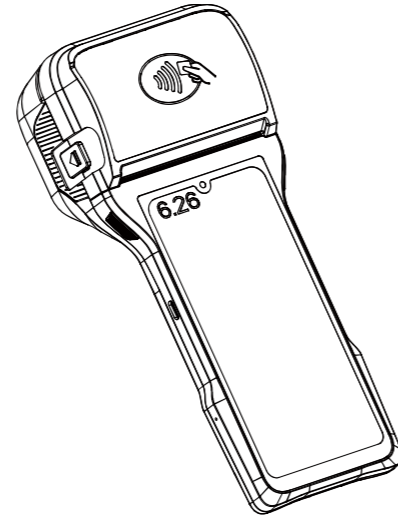


1 Packing list

After opening the box, check all the components. If any are missing, or if the product description has missing pages or other issues that significantly impact readability, please contact the seller

Item	Model/Spec	Quantity
Smart POS	PAM-300	1pc
Printer paper	80(width)* C 50(<=50mm)	1pc
Charger	5V/2A	1pc
Usb charging cable	Type-c	1pc
User Guide	/	1pc

2 Terminal layout

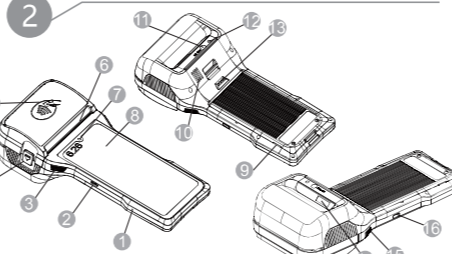

- 1. MIC
- 2. Type-C
- 3. Scan Key/Paper Feeding Key
- 4. Print-cover Switch Button
- 5. NFC
- 6. Paper Cutting Steel Sheet
- 7. Front Camera
- 8. LCD
- 9. Battery cover removal port
- 10. Speaker
- 11. Rear Camera
- 12. Flash
- 13. Charging Thimble
- 14. SCAN (Optional)
- 15. Scan Key/Paper Feeding Key
- 16. ON-OFF KEY

3 Quick entry


1. Open the device and connect with the network
2. Open the POS trade system
3. Choose the transaction amount
4. Swiping card
5. Enter password
6. Print the purchase order
7. Transaction is completed

4 User manual

1. Powering on and shutting down the terminal.
Power On: Press and hold the power button until the LCD screen lights up. Then release the button; the terminal will start up.

Shutdown: Press and hold the power button until you see a prompt to shut down the system. Click Off to initiate the shutdown process.


2. Swipe contactless card



As shown above, Please put the RFID cards on the RFID/NFC contactless card reader

PAM-300

3. Contactless card operation

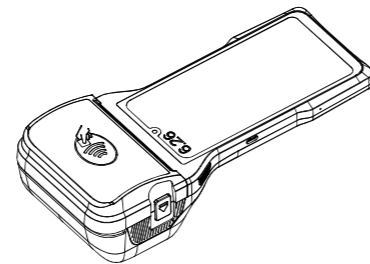

Put the contactless card into the terminal area, you can finish swiping card immediately.

4. Printer

The printer prints the purchase order once the transaction is completed.

5. Charging the Terminal Battery

Use the USB cable provided with the machine to connect the terminal to a charger. This will allow you to charge the terminal's battery. If you plan to store the terminal for an extended period, it's recommended to shut down the terminal and charge it once every three months to maintain battery health.

5 Guidelines for using lithium battery

1. Avoid damaging the USB cable. If the cable becomes damaged, it could prevent the device from being used.
2. Always use the USB cable provided in the box to charge the terminal. Using other cables or chargers may expose the terminal to incorrect voltages and could potentially damage the equipment.
3. Do not expose the terminal to direct sunlight, high temperatures, humidity, or dust.
4. Keep the device away from any liquid.
5. Avoid inserting any foreign objects into the terminal interfaces as this can seriously damage the device.
6. If the terminal isn't functioning properly, please contact our technician. Users are not allowed to attempt repairs on the terminal themselves.
7. It is strictly forbidden to disassemble the terminal or use its external interface in explosive or hazardous environments.
8. To clean the terminal, gently wipe it with a damp cloth.

6 Warranty card

Device Model	
Customer's Name	
Device Recipient	
Customer Address	
Contact Number	
Serial Number	
Date of Purchase	

Post-sale Service Record

Date	Service details	Technician	User's Signature

Attention

1. Warranty Period: The device comes with a free warranty valid for 12 months from the date of purchase.
2. Exceptions: The warranty does not cover damages caused by natural disasters, fires, or issues resulting from self-modification or misuse of the device.
3. Scope: The free warranty service only applies to the original parts as configured at the time of purchase.
4. Requirements: Warranty service will not be provided if the initial warranty card or the seal from the sales unit is missing.

单页尺寸: 68*120mm