



KSMART21 KIOSK Quick Start Guide Manual

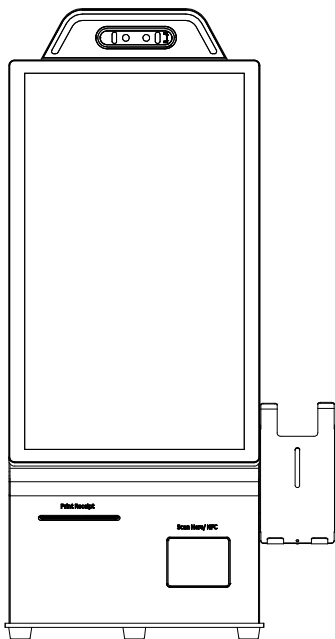


1 Rear opening design for kiosk, back cover opens without manual screwing

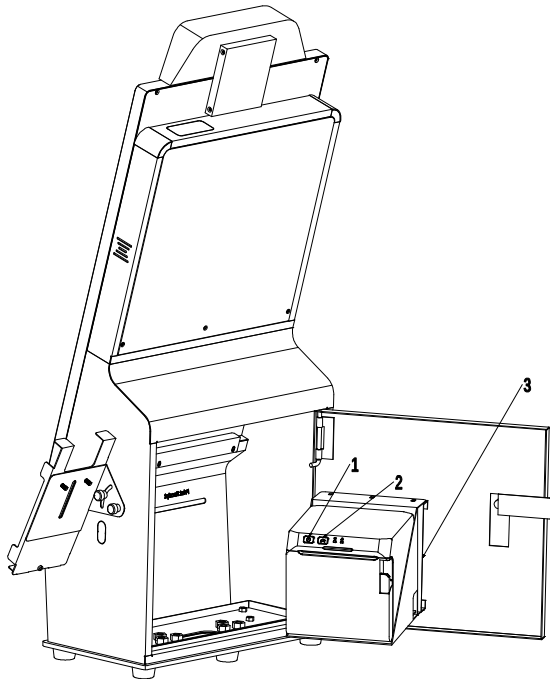

- 1. Printer power switch
- 2. Printer cover opening switch
- 3. Printer wall mount bracket

2 Internal I/O Ports introduction

- 1. Power switch
- 2. Ambient light color adjustment button
- 3. Main unit power switch
- 4. Power connector
- 5. Motherboard I/O ports
- 6. M6*6 mounting holes on the base plate
- 7. M4*5 mounting holes on the feet
- 8. PINPAD bracket, M4*2 screws; the bracket is secured to the side of the KIOSK main unit using M4*2 screws.

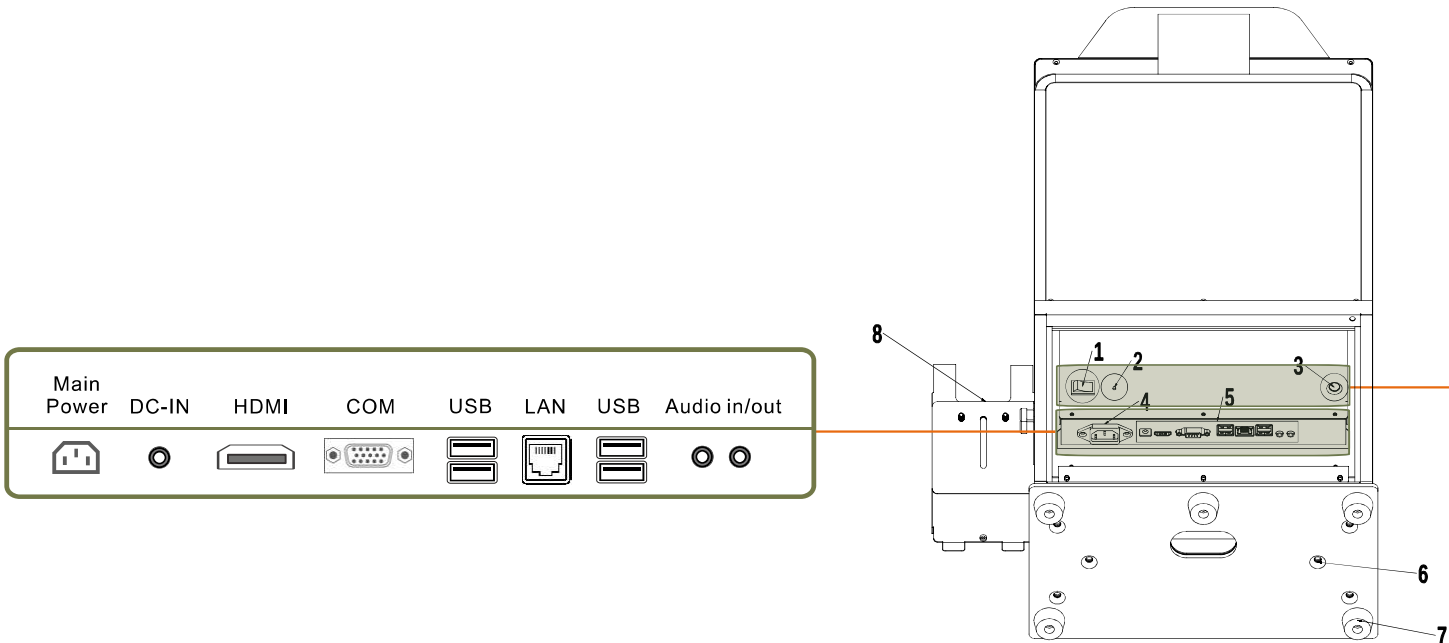

3 Optional accessories



- 1. Camera/Status LED Light
- 2. PINPAD Bracket

These accessories need to be purchased separately; the instruction diagrams in the manual are for assembly reference only.




④ Installing the Floor-Stand Bracket


1. M8*6 holes for fixing the support column to the base plate
2. M8*6 holes for fixing the main unit to the support column
3. M6*4 holes for fixing the ground to the base plate

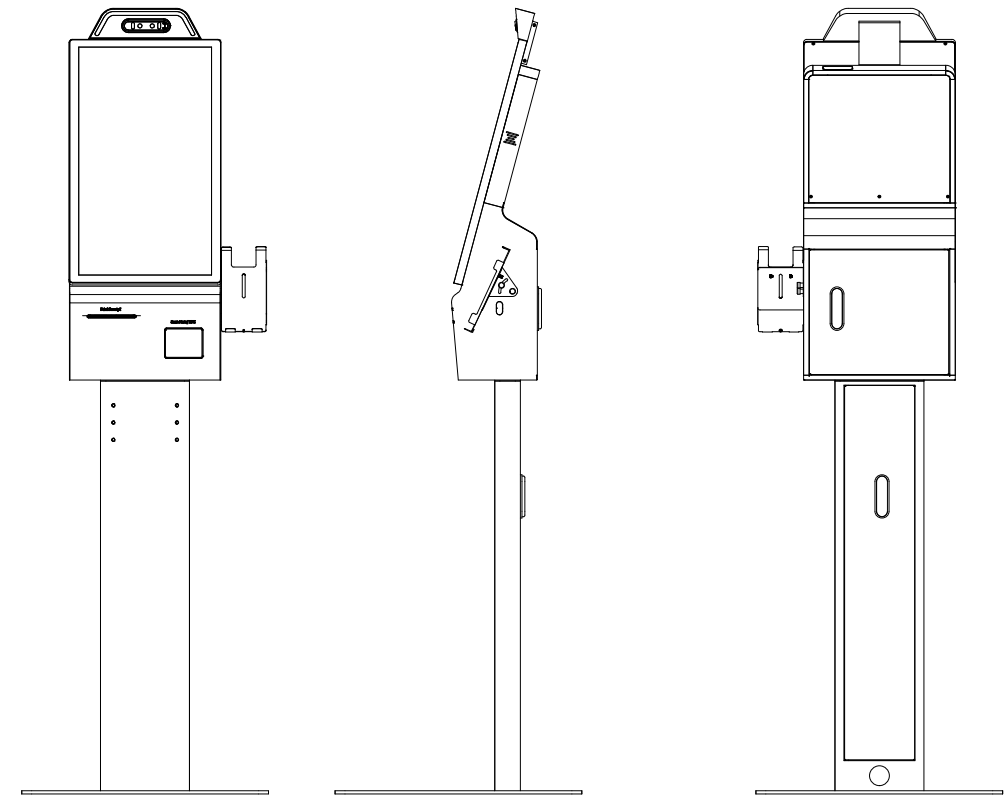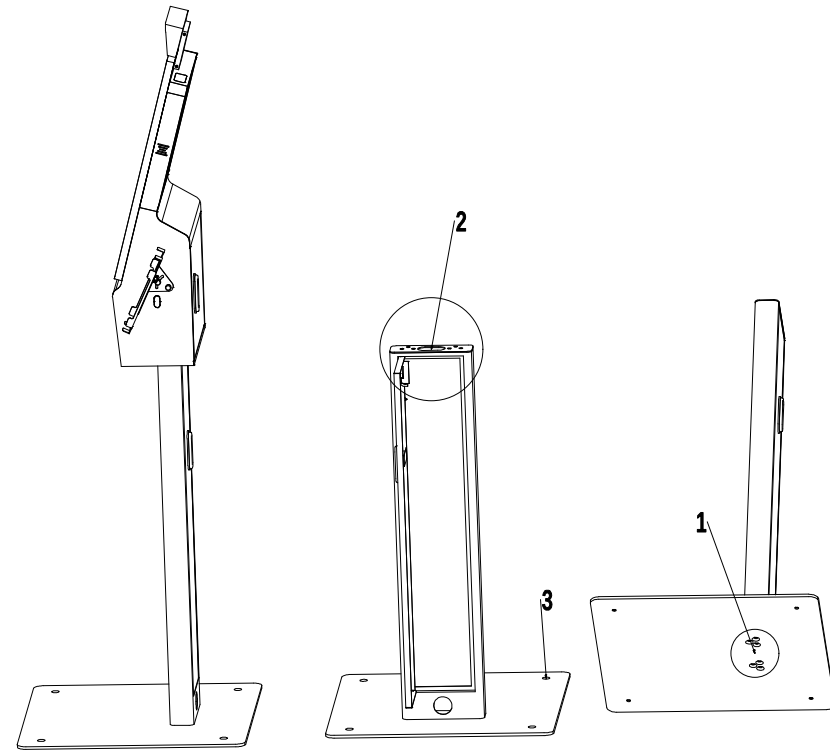

⑤ Desktop version, ready to use right out of the box no bracket installation required

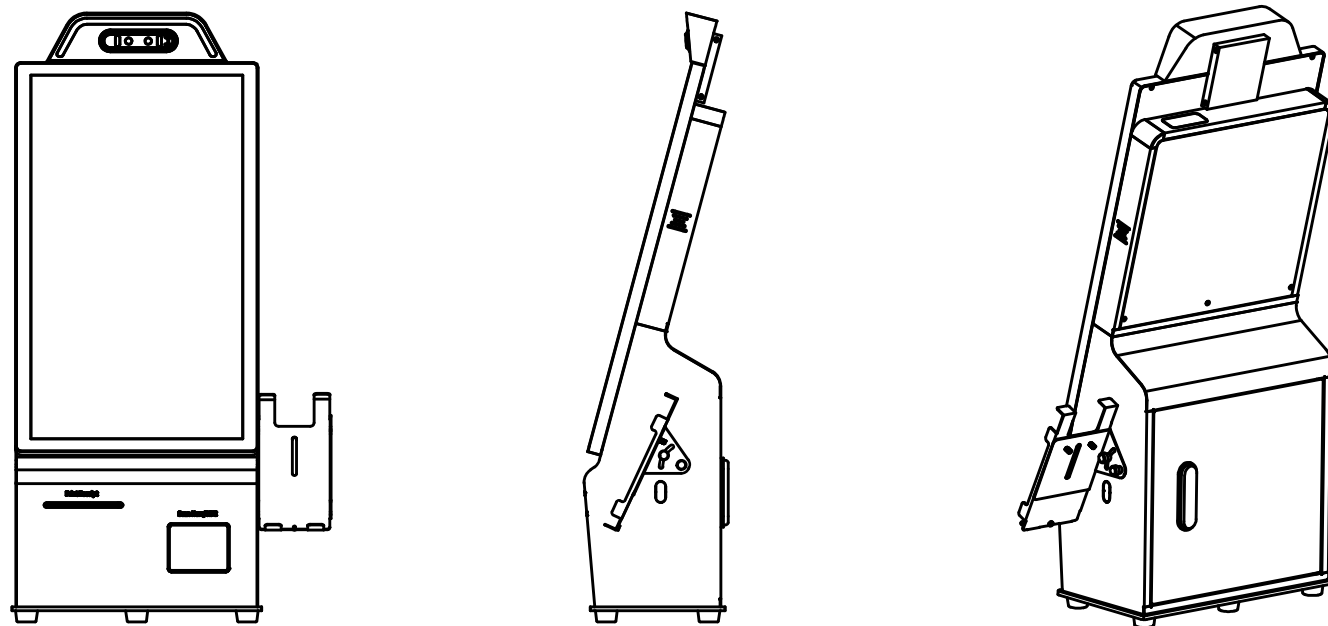

⑥ Camera Installation

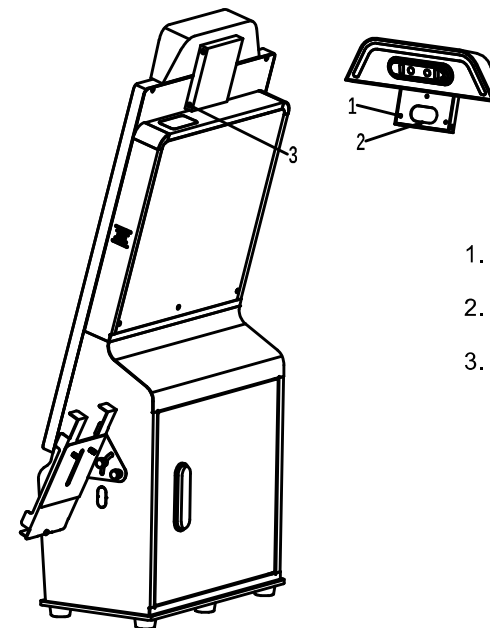

1. M3*3 holes for mounting the camera module to the main unit casing
2. Wiring holes
3. M3*4 holes for mounting the camera back cover