

AON
— always on —

24"

WIDE SCREEN
23.8 viewable

endura-240

Office/Gaming Monitor
FHD 3-Side Borderless IPS
100Hz with FreeSync™



100 Hz

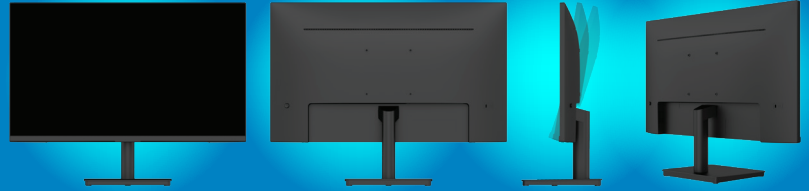
FULLHD
1920 x 1080p

Freesync



IPS Panel
High Contrast

14ms
Response Time

ENDURA Series: Engineered for unmatched clarity and built to last... ensuring a crystal-clear viewing experience that endures the test of time.



| | | | |
|---------------------------------|---|--|---|
| Model Name | Endura-240 | | |
| Panel specifications | Panel Size | 23.8" | |
| | Panel Type | IPS | |
| | Aspect ratio | 16:9 | |
| | Backlight Type | ELED | |
| | Maximum resolution | 1920×1080@100Hz | |
| | Pixel Pitch | 0.2745 (H) × 0.2745 (V) | |
| | Active Area | 527.04mm × 296.46mm | |
| | Viewing angle | H:178 °,V:178 ° (CR>10) | |
| | Surface Treatment | Anti-glare | |
| | Center Luminance of White | Min.:250nits,Typ:300nits | |
| | Contrast ratio | Typ:1000 :1 | |
| | Response time (Panel) | Typ:14ms | |
| | Response time (With OD) | Typ.:5.9ms | |
| Display Colors | 16.7 M(6bit+FRC) | | |
| Color Gamut(NTSC) | 72%(Typ.) | | |
| Interface configuration | Mainboard model | MT9700 | |
| | Input Interface | DP1.4 | / |
| | | HDMI 2.0 | *1 (1920*1080@100Hz) |
| | | VGA | *1 (1920*1080@75Hz) |
| | | "USB-A (Firmware upgrade only)" | / |
| | Output Interface | Earphone | *1 |
| Power management | Power input | DC 12V/3A | |
| | Working consumption | ≤36W | |
| | Standby consumption | ≤0.5W | |
| | Speaker | N/A | |
| Special Functions | Flicker Free | Support | |
| | Low Blue Light | Support | |
| | HDR | Support | |
| | Freesync & G-sync Compatible | Support | |
| | MPRT | Nonsupport | |
| | PIP/PBP | Nonsupport | |
| | KVM | Nonsupport | |
| Accessory | LED Monitor | 1PCS | |
| | Base | 1PCS | |
| | Instructions | 1PCS | |
| | Signal Cable | 1PCS (HDMI cable×1) | |
| | Adaptor/Power Cord | 1PCS | |
| Safety&Certification | Safety | Withstand voltage strength | ≤10mA @3.0KV AC/60S |
| | | Leakage current | ≤0.35mA @264V AC/60S |
| | | Earthing protective resistance | ≤100m Ω |
| | Authentication | CCC, CE (Refer to the actual requirements of the customer) | |
| | Environment | Working condition | Temperature: 0°C~+40°C |
| | | Storage condition | humidity: 20%~85% altitude: ≤5000m Temperature: -10°C~60°C humidity: 10%~90% |

| | | | | |
|------------------------|--------------------|----------------------------|------------------------|--|
| Structure size | Stand | model(optional) | BCE9-24 |  <p>8 10098 15213 6</p>  <p>AO-MO-1002</p> |
| | | Tilt | -5° ~ 15° | |
| | | Swivel | Nonsupport | |
| | | Pivot | Nonsupport | |
| | | Elevation | Nonsupport | |
| | | Quick release | Support | |
| | Size: LxWxT | product size(without base) | 539.8mm*46.1mm*319.1mm | |
| | | product size(with base) | 539.8mm*175mm*418.6mm | |
| | | Packing size | 590mm*87mm*480mm | |
| | Weight | Gross weight | 4.11Kg | |
| Net weight(with stand) | | 2.7Kg | | |
| Wall Mount | | 100mm ×100mm | | |